ST. TAMMANY PARISH COUNCIL

ORDINANCE

ORDINANCE CALENDAR NO: <u>5502</u>	ORDINANCE COUNCIL SERIES NO:
COUNCIL SPONSOR: MR. STEFANCIK	PROVIDED BY: COUNCIL OFFICE
INTRODUCED BY: MR. GROBY	SECONDED BY: MR. BELLISARIO
ON THE $\underline{3}$ DAY OF <u>DECEMBER</u> , $\underline{2015}$	
ORDINANCE ESTABLISHING WINDSOR COURT (R09-C-04 (STEFANCIK)	
WHEREAS, to further promote the public healt	h, safety and general welfare.
THE PARISH OF ST. TAMMANY HEREBY (ORDAINS:
SECTION I: A No Parking Zone is hereby estal	blished on Windsor Court (R09-C-040).
SECTION II: The Parish Department of Public these locations, in accordance with the attache Engi	c Works is directed to post the appropriate signs at ineering data.
REPEAL: All ordinances or parts of Ordinances	s in conflict herewith are hereby repealed.
· ·	nance shall be held to be invalid, such invalidity shall en effect without the invalid provision and to this end d to be severable.
EFFECTIVE DATE: This Ordinance shall beco	me effective fifteen (15) days after adoption.
MOVED FOR ADOPTION BY:	SECONDED BY:
WHEREUPON THIS ORDINANCE WAS SUI FOLLOWING:	BMITTED TO A VOTE AND RESULTED IN THE
YEAS:	
NAYS:	
ABSTAIN:	
ABSENT:	
	ADOPTED AT A REGULAR MEETING OF THE RUARY, 2016; AND BECOMES ORDINANCE
	MARTY DEAN, COUNCIL CHAIRMAN

ATTEST:

THERESA L. FORD, COUNCIL CLERK	
	PATRICIA P. BRISTER, PARISH PRESIDENT
Published Introduction: <u>NOVEMBER 26</u> , <u>2015</u>	
Published Adoption:, 2015	
Delivered to Parish President:, 2015 at	
Returned to Council Clerk:, 2015 at	



St. Tammany Parish

Department of Engineering P. O. Box 628 Covington, LA 70434 Phone: 985.898.2552 Fax: 985.867.5110

E-mail: eng@stpgov.org

Pat Brister
Parish President

Date:

October 23, 2015

To:

Joey Lobrano

Right Of Way Coordinator Department Of Public Works

From:

Jay Watson, P.E.

Development Engineer

Re:

Project No. 15-126

District 11

Windsor Ct. 9-C-40 Buckingham St. 9-C-39

2-NO PARKING w/ Left Arrow sign 2-NO PARKING w/ Right Arrow sign 8-NO PARKING w Double Arrow sign

1-SPEED LIMIT 25 sign

The Department of Engineering recommends the installation of Signage to be installed in District 11.

As per MUTCD, when <u>signs with arrows</u> are used to indicate the restricted parking zones, the signs with the arrows should be set at an angle of not less than 30 degrees and not more than 45 degrees, with the line of traffic flow in order to be visible to approaching traffic.

- 1. Install SPEED LIMIT 25 sign on Buckingham Ct. 300' from the Buckingham and Highway 190 intersection.
- 2. Install (2) NO PARKING with Double Arrow signs on (each side of) Windsor Ct. 90' from the Windsor Ct. and Buckingham Ct. intersection, as indicated on supplied map.
- 3. Install (2) NO PARKING with Double Arrow signs on (each side of) Windsor Ct. 90' from mailbox 1125, as indicated on supplied map.
- 4. Install NO PARKING with Right Arrow and NO PARKING with Left Arrow signs on (each side of) Windsor Ct. 15' from the intersection of Windsor Ct. and Hampton Ct. as indicated on the supplied map.
- 5. Install NO PARKING Right Arrow and NO PARKING with Left Arrow signs on (each side of) Windsor Ct. 15' from the intersection of Windsor Ct. and Hampton Ct. as indicated on the supplied map.
- 6. Install (2) NO PARKING with Double Arrow signs on (each side of) Windsor Ct. 130' from mailbox 1107, as indicated on supplied map.



- 7. Install (2) NO PARKING with Double Arrow signs on (each side of) Windsor Ct. 170' from the Windsor Ct. and Buckingham Ct. intersection, as indicated on supplied map.
- cc. Charles E. Williams, P.E.
 Michael Spiehler
 Councilman Steve Stefancik


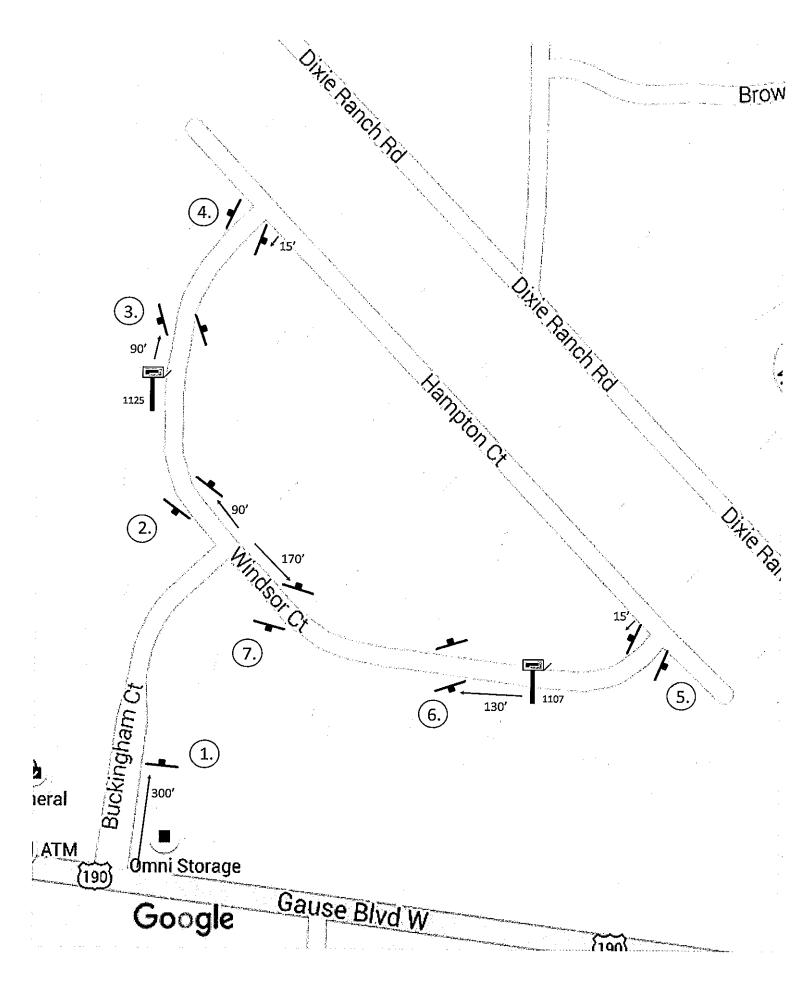



Figure 2A-2. Examples of Heights and Lateral Locations of Sign Installations

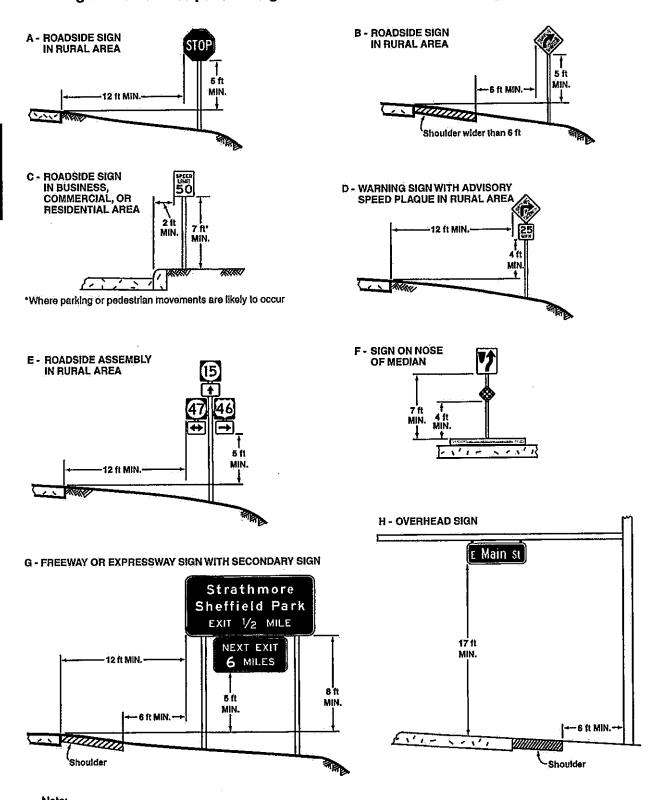

Note: See Section 2A.19 for reduced lateral offset distances that may be used in areas where lateral offsets are limited, and in business, commercial, or residential areas where sidewalk width is limited or where existing poles are close to the curb.

Page 39


Figure 2A-3. Examples of Locations for Some Typical Signs at Intersections

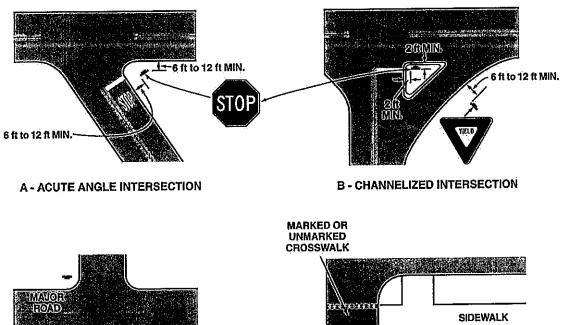


C - MINOR CROSSROAD

16 ft to 12 ft MIN.


6 ft to 12 ft MiN.



D - URBAN INTERSECTION



E - DIVISIONAL ISLAND



F - WIDE THROAT INTERSECTION

Note: Lateral offset is a minimum of 6 feet measured from the edge of the shoulder, or 12 feet measured from the edge of the traveled way. See Section 2A.19 for lower minimums that may be used in urban areas, or where lateral offset space is limited.