



ST. TAMMANY PARISH

MICHAEL B. COOPER
PARISH PRESIDENT

September 17th, 2021

Please find the following addendum to the below mentioned QUOTE.

Addendum No.: 4

Quote#: 21-45-1

Project Name: N 12th St Sidewalk

Quote Due Date: September 23rd, 2021

QUESTIONS AND ANSWERS:

Question 1.) Will a bid item be added for removal and replacement of the driveway.

Answer 1.) Bid item is already added and the Square Yards to be removed and replaced.

Question 2.) Will the contractor be responsible for the existing decorative brick retaining wall?

Answer 2.) The contractor will not be responsible for the existing decorative brick retaining wall.

Question 3.) Is the catch basin to be tied into to be repaired?

Answer 3.) The Field Notes call for the catch basin to be replaced.

End of Addendum # 4



ST. TAMMANY PARISH

MICHAEL B. COOPER
PARISH PRESIDENT

September 10th, 2021

Please find the following addendum to the below mentioned QUOTE.

Addendum No.: 3

Quote#: 21-45-1

Project Name: N 12th St Sidewalk

Quote Due Date: September 23rd, 2021

GENERAL INFORMATION:

1. Please note that the quote opening has been pushed to Thursday, September 23rd, 2021. Time and location remain the same. The last day to submit written inquiries is Thursday, September 16th, 2021, no later than 2:00 PM.
2. Add Field Notes to Attachment A of the package.
3. Add Drawing to Attachment A of the package.

QUESTIONS AND ANSWERS:

1) The work sheet says the project starts at the Trace Sta. 0+00 on North 12th St, (actually South 12th St.) and runs to Sta.5+70. Does the project cross the highway to North 12th St?

The project DOES cross the highway.

2) Are grade changes to be made to the new work?

The only grade change will be at the wooden bridge to make it even.

3) Where is the pipe and catch basins to be located?

Pipe and catch basins are noted on the drawing (accidentally omitted).

4) Are the catch basins in the paving?

The existing catch basin (to be rehabbed) is under the paving with a grate on the side.



ST. TAMMANY PARISH

MICHAEL B. COOPER
PARISH PRESIDENT

5) There is a bid item for Detectable Warning Surfaces, does the entire project need to be ADA compliant?

No, only where the detectable warning surfaces are.

6) The gas station rear driveway is failed asphalt which is wider than the proposed side walks. How is this to be addressed?

It is addressed in the drawing.

7) How is the wooden bridge transition, is any work required on the structure?

No work is required on the structure itself. The transition is discussed on question #2.

ATTACHMENTS:

Field Notes Attachment A.pdf

Drawing Attachment A.pdf

<< End of Addendum # 3 >>

PA 1 12TH ST. Sidewalk
 (R07E004)
 0+00 @ North Side of Trace
 0+08 PVC x Culvert + C/B
 0+20 ^{south side} ADW TO Trace Parking
 0+47 North Side Edge
 DW TO Trace Parking
 0+82 Start wooden Bridge
 0+98 END wooden Bridge
 1+46 Start DW FOR
 Phoenix mechanical
 + motors DW
 1+86 END DW
 1+93 C/B EAST Side SW
 2+00 Start DW @ Street
 GAS STATION

(WOOD
 PLANKS 6" x 8")
 (HOWEVER: use 2" longer
 both ends)

Replace C/B

PR 2 12th St. Sidewalk

2+50 END DW @ STORE
+ LOCATION OF NEW
CB&P pipe


3+00 START DW @ 2ND
ENTRANCE TO STORE

3+42 END DW @ 2ND
ENTRANCE

4+20 END SW ON SOUTH
SIDE OF Hwy 190
START OF 24" WIDE
CROSSWALK

4+08 END CROSSWALK ON
NORTH SIDE OF Hwy 190
START SW ON NORTH SIDE

5+70 EOP
SAWCUT SW

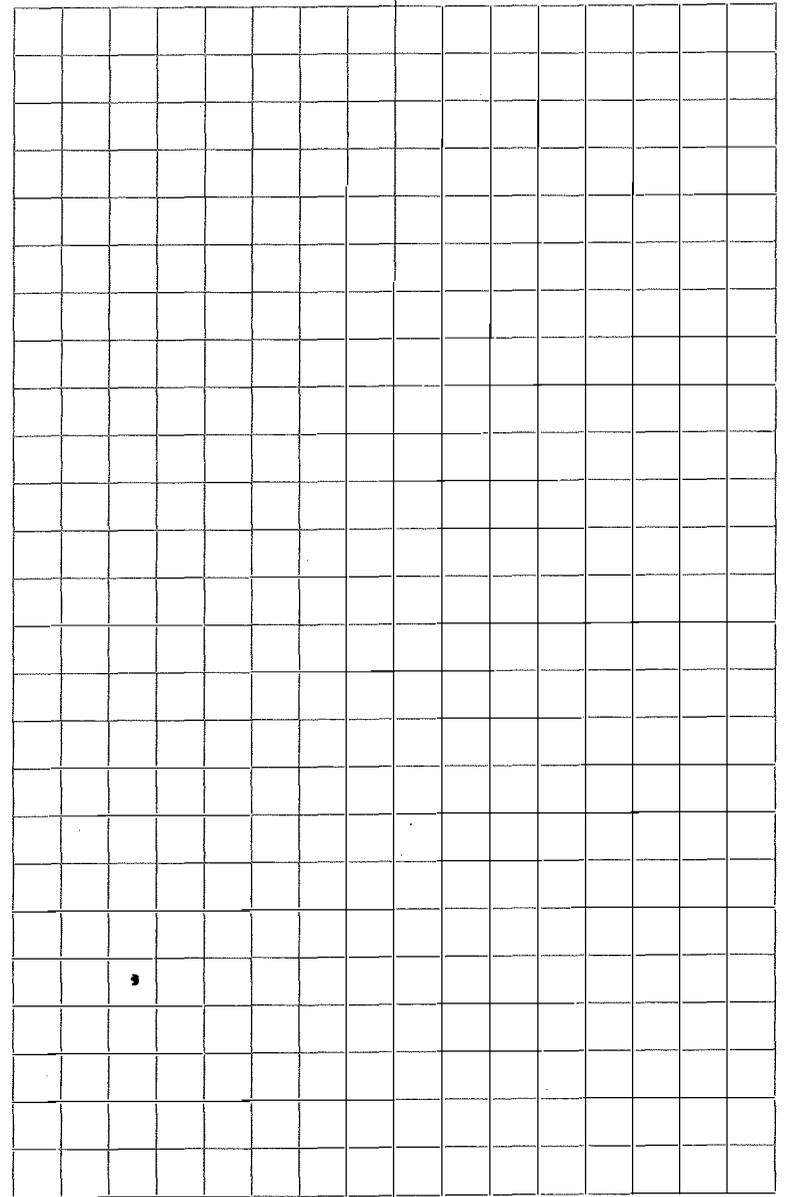

Attachment A

Project No.	
Date	5/27/2021
Scale	1" = 30'
Sheet	1
Client	LAH

LA
Department of Public Works
P.O. Box 628 Covington, LA 70434
Phone: (985) 896-2522
E-mail: eng@lapw.org



N. 12TH ST. SIDEWALK
PLAN SHEET



DETECTABLE WARNING SURFACE





ST. TAMMANY PARISH

MICHAEL B. COOPER
PARISH PRESIDENT

September 7th, 2021

Please find the following addendum to the below mentioned QUOTE.

Addendum No.: 2

Quote#: 21-45-1

Project Name: N 12th St Sidewalk

Quote Due Date: September 14th, 2021

QUESTIONS AND ANSWERS:

Question 1: Where is this street located?

Answer 1: This street is located in Lacombe, Louisiana.

End of Addendum # 2



ST. TAMMANY PARISH

MICHAEL B. COOPER
PARISH PRESIDENT

September 7th, 2021

Please find the following addendum to the below mentioned QUOTE.

Addendum No.: 1

Quote#: 21-45-1

Project Name: N 12th St. Sidewalk

Quote Due Date: September 14, 2021

GENERAL INFORMATION:

Add Specifications Attachment A

ATTACHMENTS:

Specification Attachment A.pdf

<< End of Addendum # 1 >>

Begin @ Sta. 0+00 At the Trace to Sta. 5+70 EOP Where Sidewalk Widens

Item	Description	Length	Width	Quantity	Unit
	<p>General Notes:</p> <ol style="list-style-type: none"> 1. Contractor shall field verify all quantities and measurements. 2. Contractor shall be responsible for locating and protecting all existing utilities. 3. Two-way traffic shall be maintained at all times during construction. Contractor shall have flagmen on both ends of work zone. If Police details are used for traffic control this does not take the place of flag men. 4. Construction work shall not begin until signs, barricades, project signs and other traffic devices have been erected and approved. Contractor shall maintain project and construction signs. 5. All existing sewer lines shall be tied-in at no direct pay. 6. Asphalt and concrete driveway tie-ins shall be tied in to existing surface material. 7. At all intersecting asphalt roads, contractor shall mill 1 ½" deep and 8' into intersecting road for a smooth and clean transition. See Detail attached with Bid Proposal. 8. Any additional work performed by the contractor without prior written approval from St Tammany Parish Department of Engineering, the cost of the work will be borne by the contractor and will not be reimbursed by the Parish. 9. Contractor shall ensure roadway and shoulders drain accordingly without any surface ponding/"bird baths" after rain events. 10. Materials Testing: All required testing and reporting shall be the contractor's responsibility at no direct pay. Sampling and Testing will be performed in accordance with the St. Tammany Parish Roadway Testing and Inspection Standards for Residential Subdivisions (Attached with Bid Proposal). 11. Roads and surrounding areas shall be dressed after 3 calendar days and no later than 10 calendar days of final asphalt wearing course. Late Fee of \$1.00 per Linear Foot per Calendar Day shall be charged if not completed with the specified time frame. 12. If deep patching is required, the contractor is to compact at a minimum two equal lifts. 				
	<p>Project Summary: All labor, materials, equipment and supervision necessary to improve road surfaces with: Remove and replace sidewalk.</p>				
727-01	<p>Mobilization: All labor and materials necessary to accomplish preparatory work and operations, including those necessary for movement of personnel, equipment, supplies and incidentals to the project site.</p>			1	Lump Sum

Begin @ Sta. 0+00 At the Trace to Sta. 5+70 EOP Where Sidewalk Widens

Item	Description	Length	Width	Quantity	Unit
713-01	<p>Temporary Signs and Barricades: All labor, materials, equipment and supervision necessary to furnish, install, maintain and remove temporary construction barricades, precast concrete barriers, lights, signals, pavement markings and signs, including project signs; providing flaggers; and complying with all other requirements regarding the protection of the work, workers and safety of the public. Unless otherwise noted in the plans or special provisions this work also includes traffic control management in compliance with contract documents and the Manual on Uniform Traffic Control Devices (MUTCD), including the installation, inspection, maintenance, and removal of all traffic control devices on the project. This item shall not be construed to relieve the contractor of responsibilities for the safety of the public, for liability in connection therewith, or compliance with State and local laws or ordinances. Signs, barricades, barriers, channelizing devices, pavement markings, etc., shall comply with plan details, and MUTCD. Construction work shall not begin until signs, barricades, project signs and other traffic devices have been erected and approved.</p>			1	Lump Sum
202-03-00100	<p>Remove Concrete Sidewalk (6" Thick): All labor, materials, equipment and supervision necessary to, in accordance with these specifications, Remove Concrete sidewalk in accordance with LA DOTD Standard Specifications for Roads and Bridges, Section 706 and Section 202.03, Latest Edition. Contractor shall be responsible for removal of existing concrete sidewalk and all unsuitable base materials to a depth of 6" below the bottom grade of the new 6" thick concrete sidewalk. Replacement material shall be river or pumped sand. Base repair and/or patch is not limited to a square yardage quantity, but may include the entire sidewalk if directed by Engineering inspection staff.</p>	525'	6'	350	Square Yard
706-01-00100	<p>Concrete Sidewalk (6" Thick): All labor, materials, equipment and supervision necessary to, in accordance with these specifications, Re-pour Concrete sidewalk in accordance with LA DOTD Standard Specifications for Roads and Bridges, Section 706-01 Latest Edition. Contractor shall be responsible for pouring concrete for sidewalk. Concrete will be 4000# with microfibers. Any damage caused by contractor operations shall be repaired immediately at no direct pay. Backfill with excavated material to fill where form boards were placed.</p>	525'	6'	350	Square Yard

Begin @ Sta. 0+00 At the Trace to Sta. 5+70 EOP Where Sidewalk Widens

Item	Description	Length	Width	Quantity	Unit
701-05-01000	Storm Drain Pipe (12" RPVCP): All labor, materials and equipment necessary to install 12" corrugated plastic pipe. Item shall include all required saw-cutting, excavation, backfill material and embankment. Item shall include removal and replacement of all unsuitable material as identified by St. Tammany Parish Engineering Department personnel. All pipe joints shall be wrapped with suitable geotextile fabric. Contractor installed pipe shall be cleaned of all debris and other materials prior to final acceptance. Storm drain pipe installation shall be in accordance with Section 701 of LADOTD Standard Specifications.	56'	12"	56	Linear Foot
702-03-00100	Catch Basin (CB-01): All labor, materials, equipment and supervision necessary to furnish and install catch basin in accordance with LADOTD Standard Specifications for Roads and Bridges, Section 702, and in conformity with lines and grades shown on the plans. Shop drawings of precast catch basin structures shall be provided to St. Tammany Parish Department of Engineering and approved prior to installation. All catch basins shall have TYPE "C" grate. Catch Basin shall be pre-cast concrete or concrete formed in place only.			2	Each
706-03-00700	Detectable Warning Surface: All labor, materials, equipment and supervision necessary to furnish and install catch basin in accordance with LADOTD Standard Specifications for Roads and Bridges, Install detectable warnings (Truncated Domes) where sidewalk intersects with adjoining roadways and when directed at driveways.			10	Each
S-00001	Sawcut Asphalt/Concrete- All labor, materials, equipment and supervision necessary to sawcut asphalt and concrete at specified locations.			500	In/Ft
732-01-02080	Pavement Markings 24" Thermoplastic (125 Mil)(2' X 7')- All labor, materials, equipment and supervision necessary to furnish and place reflective pavement markings. Pavement marking placement shall be in accordance with section 732 of LADOTD Standard Specifications for Roads and Bridges. This work shall be in compliance with the MUTCD.			140	Linear Foot